



PRODUCT DATASHEET

PL FLEX 600 S 30W 840 PS

PANEL FLEX 600 PS | Square recessed panel luminaires with power select feature, for 600 x 600 mm ceiling systems

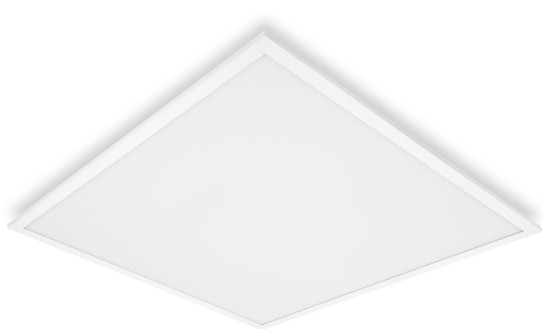

Areas of application

- Suitable for recessed ceiling systems with grid size of 600 x 600 mm
- Direct replacement for recessed luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators

Product benefits

- Highly versatile due to selectable power steps (Power Select - PS) on the driver and up to 4860 lm
- Energy savings thanks to high system efficacy: up to 169 lm/W
- High color consistency with SDCM 3
- External driver for extended flexibility and easy installation
- Low flicker light thanks to special electronic control gear
- Tool-free electrical connection due to push button connector
- Through-wiring possible with included connector box
- Decentral emergency lighting possible with separately available LEDVANCE Emergency Conversion Box
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- 7 years guarantee

Product features

- Lifetime (L80/B10): 100,000 h (at 25 °C), (L90/B10): 50,000 h (at 25 °C)
- Suitable for central battery emergency installations acc. to EN 60598-2-22



- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Extruded aluminum frame, metal housing
- Polystyrene diffuser
- Luminaire versions with IoT-ready DALI-2 driver available


TECHNICAL DATA

Electrical data


Nominal wattage	30 W / 25 W / 21 W / 17 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	140.000 mA
Inrush current	11.1 A
Inrush current time T_{h50}	600 μ s
Max. number of luminaires per miniature circuit breaker B16	12
Max. number of luminaires per miniature circuit breaker C10	13
Max. number of luminaires per miniature circuit breaker C16	21
Power factor λ	> 0.90
Total harmonic distortion	< 15 %
Protection class	II
Operating mode	External LED driver

Photometrical data

Luminous flux	4860 lm / 4130 lm / 3510 lm / 2880 lm
Luminous efficacy	162 lm/W / 165 lm/W / 167 lm/W / 169 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 3 sdc _{cm}
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	110 °

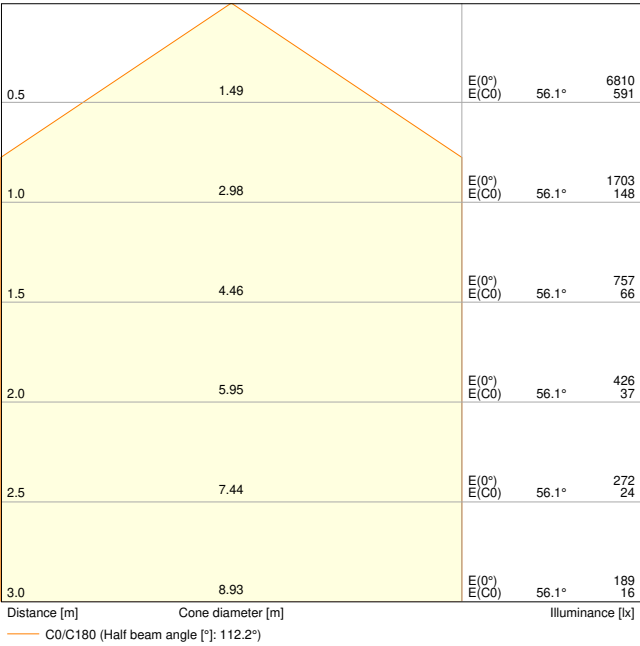


PL FLEX 600 S 30W 4000K 4860lm

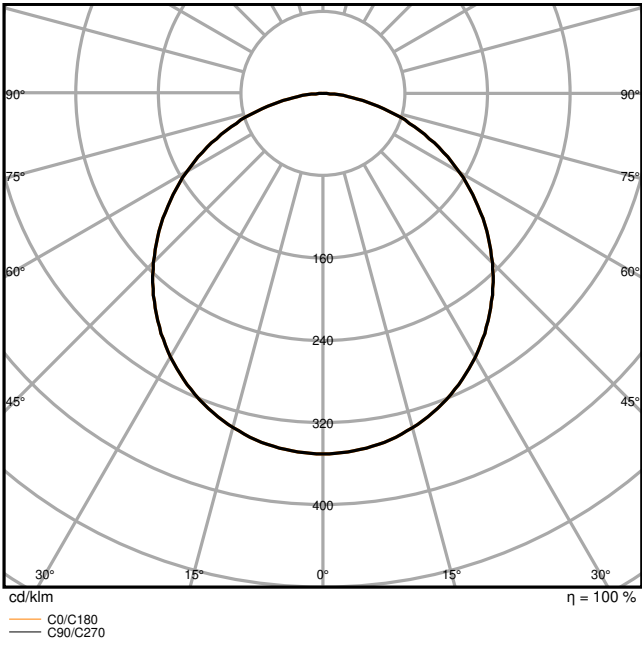

PL FLEX 600 S 30W 4000K 4860lm

Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	32.00 mm
Product weight	1500.00 g

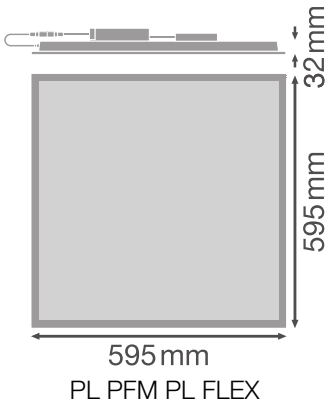

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polystyrene (PS)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Mounting length	595.00 mm
Mounting width	595.00 mm
Mounting depth	50 mm
Adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L80/B50 at 25 °C	100000 h
Lifespan L90/B10 at 25 °C	50000 h
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	700 mA
ECG - Output ripple current	< 5 %
ECG - Length	125 mm

ECG - Width	60 mm
ECG - Height	30 mm
Recommended control gear	DR DS-P-30/220-240/700 PL FLEX 600

Emergency lighting

Type of Emergency Lighting (EL)	Optional EL unit (battery and controller) for decentral operation available separately / EL certified driver (0Hz / DC operation) for central battery operation included
---------------------------------	--

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC / EPD / EL
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	By the end consumer

Additional product data

Added function	MULTI SELECT
----------------	--------------

Accessories Optional

Product image	Product name	EAN
	DR DS-P- 30/220-240/700 PL FLEX 600	4058075843684
	EM CONVERSION BOX	4058075237025
	PANEL Suspension Kit	4058075402928
	PANEL RECESSED MOUNT CLIPS VAL 4x	4058075409859

Product image	Product name	EAN
	PANEL 600 SURFACE MOUNT KIT H75	4058075472914
	PANEL 600 SURFACE MOUNT KIT H70 VAL	4058075402843

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Connector box with 5-pole terminal included
- Security rope for luminaire included
- Security brackets preinstalled
- External control gear included
- Suitable for use with separate Emergency Conversion Box
- Serviceable luminaire: Upgrades and replacements available

DOWNLOAD DATA


	Documents and certificates	Document name
	User instruction / safety instructions	PANEL FLEX
	Legal information	LSI PANEL FLEX
	Legal information	Legal Insert PL FLEX
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	EM Insert PL FLEX
	Declarations of conformity	PL FLEX
	Declarations of conformity UKCA	PL FLEX

Photometric and lighting design files		Document name
	IES file (IES)	PL FLEX 600 S 30W 4000K 4860lm
	IES files (IES, additional)	PL FLEX 600 S 17W 4000K 2880lm
	IES files (IES, additional)	PL FLEX 600 S 21W 4000K 3510lm
	IES files (IES, additional)	PL FLEX 600 S 25W 4000K 4130lm
	IES files (IES, additional)	PL FLEX 600 S 3W 4000K 400lm EM BOX
	LDT file (Eulumdat)	PL FLEX 600 S 30W 4000K 4860lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 17W 4000K 2880lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 21W 4000K 3510lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 25W 4000K 4130lm
	LDT files (Eulumdat, additional)	PL FLEX 600 S 3W 4000K 400lm EM BOX
	ULD file (DIALux)	PL FLEX 600 S 30W 840 PS
	ROLF file (RELUX)	PL FLEX 600 S 30W 840 PS
	UGR file (UGR table)	PL FLEX 600 S 17W 4000K 2880lm
	UGR file (UGR table)	PL FLEX 600 S 21W 4000K 3510lm
	UGR file (UGR table)	PL FLEX 600 S 25W 4000K 4130lm
	UGR file (UGR table)	PL FLEX 600 S 30W 4000K 4860lm
	UGR file (UGR table)	PL FLEX 600 S 3W 4000K 400lm EM BOX
	Light distribution curve type cone	PL FLEX 600 S 30W 4000K 4860lm
	Light distribution curve type polar	PL FLEX 600 S 30W 4000K 4860lm



The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

PANEL, FLEXI 800 X 1200	OVER	W 800 mm	h	W 800 mm	h	W 800 mm	h
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	30	792	40	800	30	792
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	40	816	40	816	40	816
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	50	840	50	840	50	840
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	60	864	60	864	60	864
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	70	888	70	888	70	888
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	80	912	80	912	80	912
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	90	936	90	936	90	936
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	100	960	100	960	100	960
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	110	984	110	984	110	984
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	120	1008	120	1008	120	1008
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	130	1032	130	1032	130	1032
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	140	1056	140	1056	140	1056
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	150	1080	150	1080	150	1080
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	160	1104	160	1104	160	1104
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	170	1128	170	1128	170	1128
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	180	1152	180	1152	180	1152
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	190	1176	190	1176	190	1176
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	200	1200	200	1200	200	1200
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	210	1224	210	1224	210	1224
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	220	1248	220	1248	220	1248
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	230	1272	230	1272	230	1272
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	240	1296	240	1296	240	1296
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	250	1320	250	1320	250	1320
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	260	1344	260	1344	260	1344
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	270	1368	270	1368	270	1368
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	280	1392	280	1392	280	1392
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	290	1416	290	1416	290	1416
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	300	1440	300	1440	300	1440
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	310	1464	310	1464	310	1464
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	320	1488	320	1488	320	1488
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	330	1512	330	1512	330	1512
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	340	1536	340	1536	340	1536
PL, FLEXI 800 X 3000 40 FS	DR DS 0-30-2020-240/70 FS, FLEXI 800	350	1560	350	1560	350	1560



– For Guarantee see www.ledvance.com/guarantee

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.