

PRODUCT DATASHEET

PL FLEX 625 S 32W 840 U19 PS

PANEL FLEX 625 UGR<19 PS | Square recessed panel luminaire with power select feature and low glare, for 625 x 625 mm ceiling systems



Areas of application

- Suitable for recessed ceiling systems with grid size of 625 x 625 mm
- Direct replacement for recessed luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators

Product benefits

- Highly versatile due to selectable power steps (Power Select - PS) on the driver and up to 5220 lm
- Energy savings thanks to high system efficacy: up to 170 lm/W
- Good glare reduction ($UGR \leq 19$)
- High color consistency with SDCM 3
- External driver for extended flexibility and easy installation
- Low flicker light thanks to special electronic control gear
- Tool-free electrical connection due to push button connector
- Through-wiring possible with included connector box
- Decentral emergency lighting possible with separately available LEDVANCE Emergency Conversion Box
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- 7 years guarantee

Product features

- Lifetime (L80/B10): 100,000 h (at 25 °C), (L90/B10): 50,000 h (at 25 °C)



- Suitable for central battery emergency installations acc. to EN 60598-2-22
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Extruded aluminum frame, metal housing
- Polystyrene diffuser
- Luminaire versions with IoT-ready DALI-2 driver available

TECHNICAL DATA

Electrical data


Nominal wattage	32 W / 27 W / 22 W / 17 W ¹⁾
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	145.000 mA
Inrush current	11.1 A
Inrush current time T _{h50}	600 µs
Max. number of luminaires per miniature circuit breaker B16	12
Max. number of luminaires per miniature circuit breaker C10	13
Max. number of luminaires per miniature circuit breaker C16	21
Power factor λ	> 0.90
Total harmonic distortion	< 15 %
Protection class	II
Operating mode	External LED driver

¹⁾ The Panel Flex family is fulfilling the technical minimum requirements according to the German BEG subsidy program for energy efficient luminaires


Photometrical data

Luminous flux	5220 lm / 4460 lm / 3680 lm / 2890 lm ¹⁾
Luminous efficacy	163 lm/W / 165 lm/W / 167 lm/W / 170 lm/W ¹⁾
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	≤3 sdcn
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	90 °
UGR	< 19

¹⁾ The Panel Flex family is fulfilling the technical minimum requirements according to the German BEG subsidy program for energy efficient luminaires

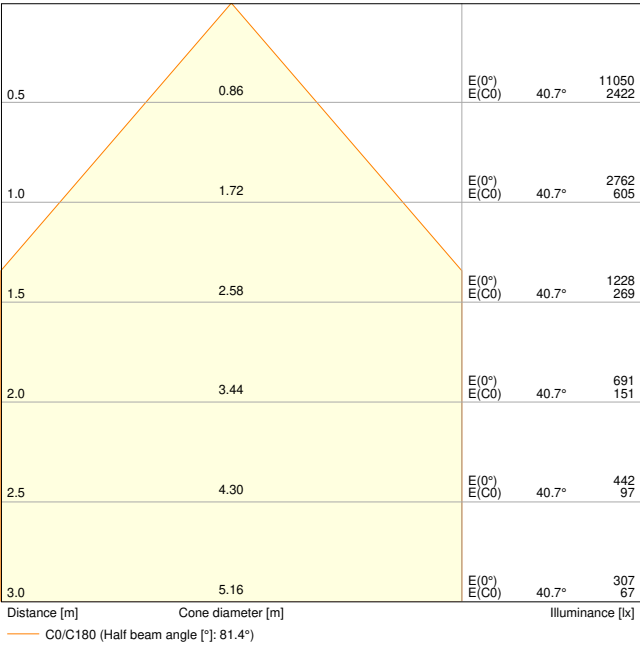


PL FLEX 625 S 32W 4000K U19 5220lm

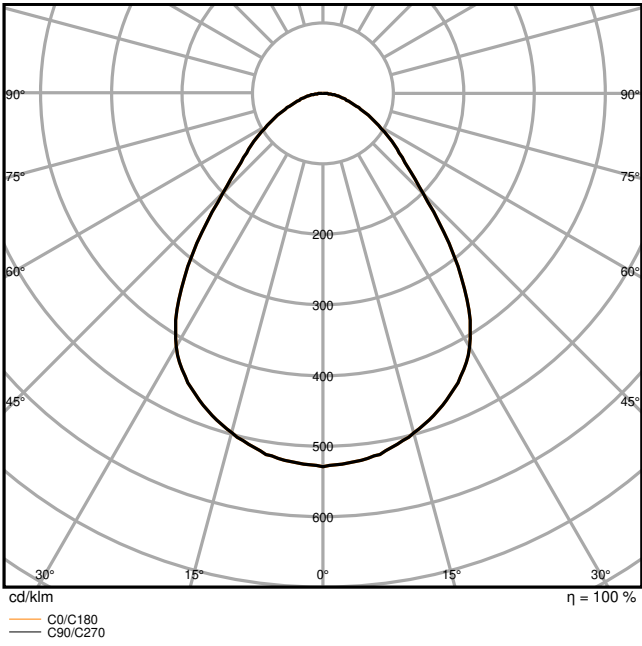

PL FLEX 625 S 32W 4000K U19 5220lm

Dimensions & Weight

Length	620.00 mm
Width	620.00 mm
Height	32.00 mm
Product weight	1700.00 g

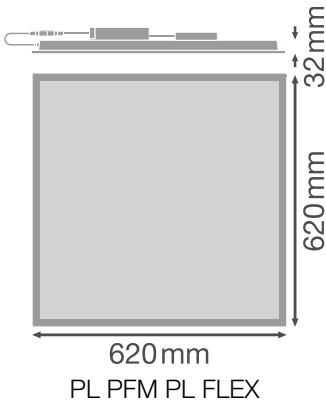

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polystyrene (PS)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Mounting length	620 mm
Mounting width	620 mm
Mounting depth	50 mm
Adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L80/B50 at 25 °C	100000 h
Lifespan L90/B10 at 25 °C	50000 h
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	750 mA
ECG - Output ripple current	< 5 %
ECG - Length	125 mm

ECG - Width	60 mm
ECG - Height	30 mm
Recommended control gear	DR DS-P-32/220-240/750 PL FLEX 625

Emergency lighting

Type of Emergency Lighting (EL)	Optional EL unit (battery and controller) for decentral operation available separately / EL certified driver (0Hz / DC operation) for central battery operation included
---------------------------------	--

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC / EPD / EL
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	By the end consumer

Additional product data

Added function	MULTI SELECT
----------------	--------------

Accessories Optional

Product image	Product name	EAN
	DR DS-P- 32/220-240/750 PL FLEX 625	4058075843691
	PANEL 625 RECESSED MOUNT FRAME	4058075402904
	EM CONVERSION BOX	4058075237025
	PANEL Suspension Kit	4058075402928
	PANEL RECESSED MOUNT CLIPS VAL 4x	4058075409859

Product image	Product name	EAN
	OTi DALI 50/220...240/1A4 NFC	4062172061889
	PANEL 625 SURFACE MOUNT KIT H75	4058075472938

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Connector box with 5-pole terminal included
- Security brackets preinstalled
- External control gear included
- Suitable for use with separate Emergency Conversion Box
- Serviceable luminaire: Upgrades and replacements available

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	PANEL FLEX
	Legal information	LSI PANEL FLEX
	Legal information	Legal Insert PL FLEX
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	EM Insert PL FLEX
	Declarations of conformity	PL FLEX
	Declarations of conformity UKCA	PL FLEX
Photometric and lighting design files		Document name
	IES file (IES)	PL FLEX 625 S 32W 4000K U19 5220lm


Photometric and lighting design files		Document name
	LDT file (Eulumdat)	PL FLEX 625 S 32W 4000K U19 5220lm
	ULD file (DIALux)	PL FLEX 625 S 32W 840 U19 PS
	ROLF file (RELUX)	PL FLEX 625 S 32W 840 U19 PS
	UGR file (UGR table)	PL FLEX 625 S 32W 4000K U19 5220lm
	Light distribution curve type cone	PL FLEX 625 S 32W 4000K U19 5220lm
	Light distribution curve type polar	PL FLEX 625 S 32W 4000K U19 5220lm
CAD/BIM files		Document name
	BIM Revit 3D	PL FLEX
	CAD STEP 3D	PL FLEX 625
Tender texts		Document name
	Tender documents	PANEL FLEX 625 UGR19 PS 32W 840 U19 PS-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854276569	Folding box 1	35 mm x 625 mm x 710 mm	2374.00 g	15.53 dm ³
4099854276576	Shipping box 4	737 mm x 179 mm x 657 mm	10818.00 g	86.67 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



DR DS-P-30-220-240/750

DS-P-220V • 277V • 171V • 17V

DR DS-P-32-220-240/750

DS-P-220V • 277V • 171V • 17V

PANEL FLEX 600 • 600 •

ORDER

W INCH

INCHES

INCHES

W/INCH

PL FLEX 625 S 30W 600 750

DR DS-P-30-220-240/750

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 750

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 1100

DR DS-P-30-220-240/1100

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 1100

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 1500

DR DS-P-30-220-240/1500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 1500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 2000

DR DS-P-30-220-240/2000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 2000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 2500

DR DS-P-30-220-240/2500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 2500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 3000

DR DS-P-30-220-240/3000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 3000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 3500

DR DS-P-30-220-240/3500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 3500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 4000

DR DS-P-30-220-240/4000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 4000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 4500

DR DS-P-30-220-240/4500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 4500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 5000

DR DS-P-30-220-240/5000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 5000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 5500

DR DS-P-30-220-240/5500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 5500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 6000

DR DS-P-30-220-240/6000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 6000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 6500

DR DS-P-30-220-240/6500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 6500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 7000

DR DS-P-30-220-240/7000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 7000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 7500

DR DS-P-30-220-240/7500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 7500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 8000

DR DS-P-30-220-240/8000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 8000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 8500

DR DS-P-30-220-240/8500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 8500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 9000

DR DS-P-30-220-240/9000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 9000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 9500

DR DS-P-30-220-240/9500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 9500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 10000

DR DS-P-30-220-240/10000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 10000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 10500

DR DS-P-30-220-240/10500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 10500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 11000

DR DS-P-30-220-240/11000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 11000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 11500

DR DS-P-30-220-240/11500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 11500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 12000

DR DS-P-30-220-240/12000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 12000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 12500

DR DS-P-30-220-240/12500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 12500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 13000

DR DS-P-30-220-240/13000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 13000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 13500

DR DS-P-30-220-240/13500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 13500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 14000

DR DS-P-30-220-240/14000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 14000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 14500

DR DS-P-30-220-240/14500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 14500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 15000

DR DS-P-30-220-240/15000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 15000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 15500

DR DS-P-30-220-240/15500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 15500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 16000

DR DS-P-30-220-240/16000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 16000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 16500

DR DS-P-30-220-240/16500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 16500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 17000

DR DS-P-30-220-240/17000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 17000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 17500

DR DS-P-30-220-240/17500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 17500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 18000

DR DS-P-30-220-240/18000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 18000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 18500

DR DS-P-30-220-240/18500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 18500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 19000

DR DS-P-30-220-240/19000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 19000

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 19500

DR DS-P-30-220-240/19500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 32W 600 19500

DS-P-220V • 277V • 171V • 17V

PL FLEX 625 S 30W 600 20000