

PRODUCT DATASHEET

DP FLEX TH 1200 P 34W ML 865 IP66

DAMP PROOF FLEX THROUGHWIRING | Flexible damp-proof luminaires with through-wiring and Multi Lumen function



Areas of application

- Industrial and storage facilities
- Workshops, assembly lines
- Passages, underpasses
- Parking garages
- Underground parking



Product benefits

- Uniform light distribution
- Easy upgradeability of light source and driver (EVERLOOP design)
- Enables participation in funding programs in certain countries to replace light source and driver
- Easy access to electrical terminal thanks to end caps with twist and lock mechanism
- Easy installation as mounting brackets can be positioned freely on the luminaire
- Tool-free electrical connection due to push button connector
- Energy savings of up to 66 % (compared to luminaires that use fluorescent lamps)
- Low flicker ≤ 5 %

Product features

- High luminous efficacy: up to 165 lm/W
- Lifetime (L80/B50): up to 100,000 h (at 25 °C)
- Housing and diffuser material: polycarbonate (PC)
- Multi Lumen function: power steps selectable



- Through-wiring 3x1.5mm² already installed
- Beam angle: 120°
- Protection rating: IP66
- Impact resistance: IK08


TECHNICAL DATA

Electrical data


Nominal wattage	34 W / 31 W / 26 W / 19 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	153/128/119/90 mA
Inrush current	20 A
Inrush current time T_{h50}	187 μ s
Max. number of luminaires per miniature circuit breaker B16	26
Max. number of luminaires per miniature circuit breaker C10	28
Max. number of luminaires per miniature circuit breaker C16	42
Power factor λ	≥ 0.90
Total harmonic distortion	≤ 23 %
Protection class	II
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	5600 lm / 5100 lm / 4300 lm / 3100 lm
Luminous efficacy	165 lm/W / 163 lm/W
Color temperature	6500 K
Light color (designation)	Cool Daylight
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 5 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	≤ 1
Stroboscope effect metric (SVM)	< 0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	120 °
UGR	≤ 25.4

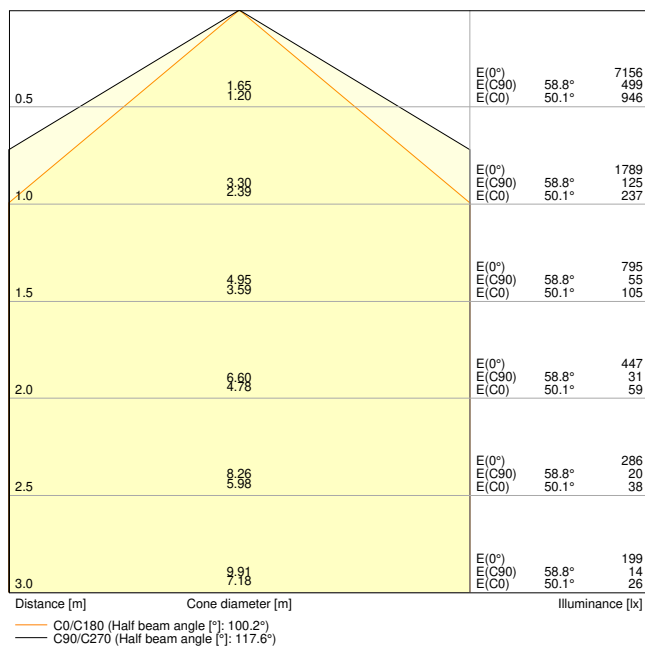

DP FLEX TH 1200 P 34W ML 865 IP66

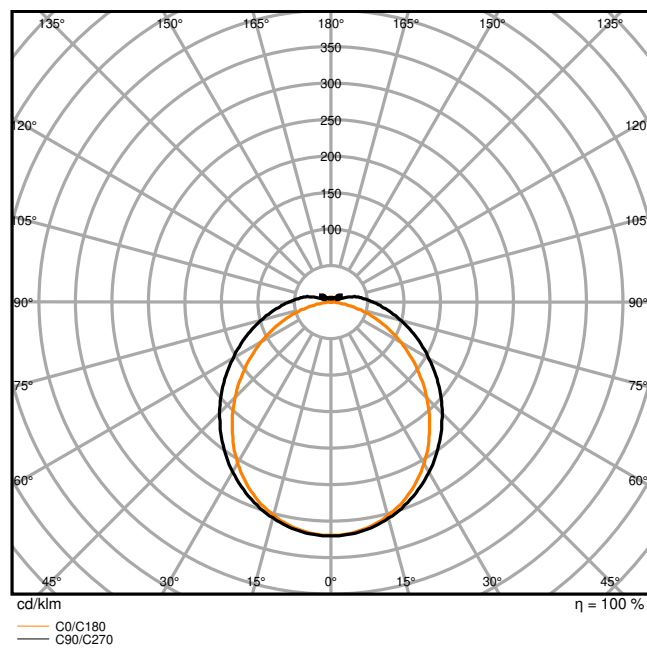


DP FLEX TH 1200 P 34W ML 865 IP66

Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
34 W	6500 K	5600 lm	165 lm/W
31 W	6500 K	5100 lm	165 lm/W
26 W	6500 K	4300 lm	165 lm/W
19 W	6500 K	3100 lm	163 lm/W

Dimensions & Weight

Length	1290.00 mm
Width	88.00 mm
Height	73.00 mm
Product weight	1225.00 g



DP FLEX TH

Materials & Colors

Product color	Gray
Housing color	Gray
RAL Color (most similar)	RAL 7045
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-30...+50 °C
Temperature range at storage	-40...+80 °C
Type of connection	Screwless terminal, 3-Pole (N, E, L)
Type of protection	IP66
Protection class IK (shock resistance)	IK08
Dimmable	No
Mounting type	Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
With light source	Yes
Replaceable light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
---------------------------	------------------------

Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L80/B50 at 25 °C	100000 h
Lifespan L90/B10 at 25 °C	61000 h
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	225/125 mA
ECG - Output ripple current	5 %

Emergency lighting

Type of emergency operation test	None
----------------------------------	------

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	Yes
Ball shot safe	No

Additional product data

Product remark	When used in very cold applications as in cold storage, a special membrane might be required to ensure lifetime
Added function	EVERLOOP / MULTI SELECT

EQUIPMENT / ACCESSORIES

- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)
- EVERLOOP luminaire: upgrades and replacements available

Upgrade and replacement components

Components Light Source		
Product image	Product name	EAN
	LISOEV 1150X35 54 34W 865 DP FLEX	4099854522185
Components Driver		

Product image	Product name	EAN
	DR DS-P -40/220-240/475 L NSV	4099854258497

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.

DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	DP FLEX TH
 Legal information	Safety Insert G11201420
 Legal information	Informationstext 18 Abs 4 ElektroG
 Legal information	LSI DP FLEX TH IP66
 Legal information	Legal Insert DP HE
 Declarations of conformity	DP FLEX TH
 Declarations of conformity UKCA	DP FLEX TH
 Certificates	DAMP PROOF FLEX TH

Photometric and lighting design files	Document name
 IES file (IES)	DP FLEX TH 1200 P 34W ML 865 IP66
 LDT file (Eulumdat)	DP FLEX TH 1200 P 34W ML 865 IP66
 ULD file (DIALux)	DP FLEX TH 1200 P 34W ML 865 IP66


Photometric and lighting design files		Document name
	ROLF file (RELUX)	DP FLEX TH 1200 P 34W ML 865 IP66
	UGR file (UGR table)	DP FLEX TH 1200 P 34W ML 865 IP66
	Light distribution curve type cone	DP FLEX TH 1200 P 34W ML 865 IP66
	Light distribution curve type polar	DP FLEX TH 1200 P 34W ML 865 IP66
CAD/BIM files		Document name
	BIM Revit 3D	Damp Proof Flex
	CAD STEP 3D	DP FLEX TH 1200
Tender texts		Document name
	Tender documents	DAMP PROOF FLEX THROUGHWIRING 1200 P 34W ML 865 IP66-en

LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854440625	Folding box 1	1,328 mm x 95 mm x 78 mm	1457.00 g	9.84 dm ³
4099854440632	Shipping box 6	1,350 mm x 248 mm x 215 mm	9881.00 g	71.98 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



Model	Power	Beam angle	Beam diameter	Mounting	IP	Material	Weight	Volume
DP FLEX TH 1200 P 34W ML 865 IP66	34W	12°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	15°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	20°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	25°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	30°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	35°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	40°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	45°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	50°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	55°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	60°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	65°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	70°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	75°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	80°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	85°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	90°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	95°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	100°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	105°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	110°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	115°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³
DP FLEX TH 1200 P 34W ML 865 IP66	34W	120°	1200mm	TH	IP66	Aluminum	1457g	9.84dm ³





References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.