


PRODUCT DATASHEET

LISOEV 1074x29 50 40W 940 S90U19 GY

LINEAR INDIVILED LIGHT SOURCES DIRECT | Upgrade or replacement light source unit for symmetric light distribution

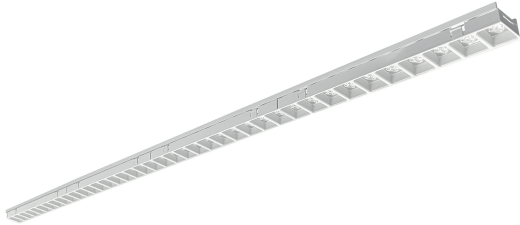

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Easy installation, no tools required for connection
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90

Product features

- Symmetric light distribution
- Lifetime (L80/B10): 70,000 h (at 25 °C)
- Beam angle: 90°


TECHNICAL DATA

Electrical data


Nominal wattage	40.00 W
Nominal voltage	45 V
Nominal current	800.000 mA

Photometrical data

Luminous flux	5050 lm
Luminous efficacy	126 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdcm
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	90 °
UGR	19

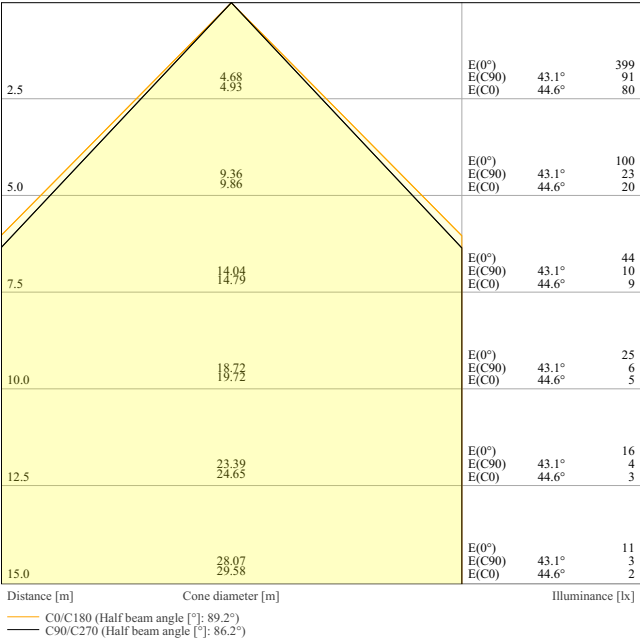

LISOEV 1074X29 50 40W 940 S90U19 GY LEDV 800mA

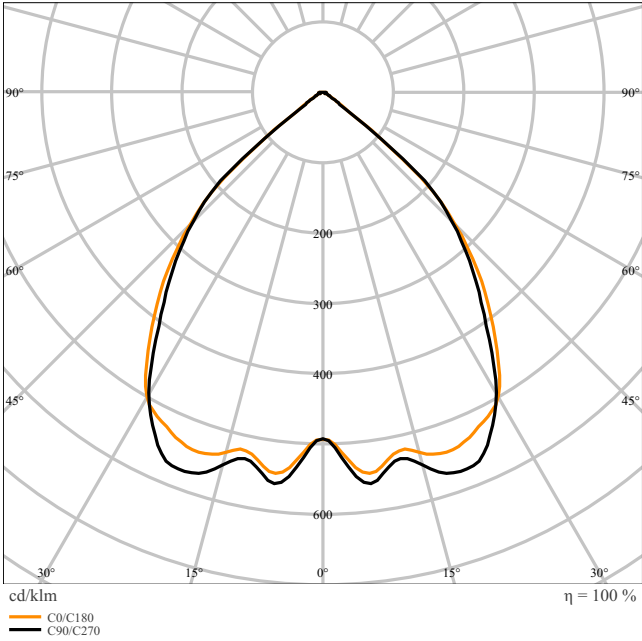


LISOEV 1074X29 50 40W 940 S90U19 GY LEDV 800mA

Dimensions & Weight

Length	1074.00 mm
--------	------------

Width	29.00 mm
Height	19.00 mm
Product weight	363.00 g
Cable length	100.000



1 2m DIRECT LED MODULE

Materials & Colors

Product color	Grey
Housing color	Grey

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Push-in clamp
Type of protection	IP20
Dimmable	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h
Lifespan L80/B10 at 25 °C	70000 h
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
-----------	---------------------------------------

Additional product data

Product remark	Available from September 2025
----------------	-------------------------------

Safety advice

– All electrical connections must be made by a qualified person.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	User instruction G11244437
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11218810
	Legal information	Legal Insert G11244392
	Legal information	LSI insert G11244301
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
Photometric and lighting design files		Document name
	IES file (IES)	LISOEV 1074X29 50 40W 940 S90U19 GY LEDV 800mA
	LDT file (Eulumdat)	LISOEV 1074X29 50 40W 940 S90U19 GY LEDV 800mA
	UGR file (UGR table)	LISOEV 1074X29 50 40W 940 S90U19 GY LEDV 800mA
	Light distribution curve type cone	LISOEV 1074X29 50 40W 940 S90U19 GY LEDV 800mA
	Light distribution curve type polar	LISOEV 1074X29 50 40W 940 S90U19 GY LEDV 800mA
CAD/BIM files		Document name
	CAD STEP 3D	LN INDV DIRECT G2 LISOEV 1200

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854284809	Folding box 1	36 mm x 1,082 mm x 26 mm	449.00 g	1.01 dm ³
4099854284816	Shipping box 10	1,094 mm x 184 mm x 65 mm	5044.00 g	13.08 dm ³
4099854284823	Shipping box 20	1,114 mm x 204 mm x 158 mm	11196.00 g	35.91 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products.

DIRECT			INDIRECT			DIRECT			INDIRECT		
EAN	LODEV	EAN	LODEV	EAN	LINEAR INDELEV*WT	EAN	LODEV	EAN	LODEV	EAN	LINEAR INDELEV*WT
					40895410318	D 100P P 40M 300 PLS WT				40895407620	D 100P P 40M 300 PLS BK
					40895410320	D 100P P 40M 300 PLS WT				40895407632	D 100P P 40M 300 PLS BK
					40895410312	D 100P P 40M 300 CAI WT				40895407644	D 100P P 40M 300 CAI BK
40895404303	LODEV 107020 44 40M 300 100 50 10				40895410308	D 100P P 40M 300 CAI WT				40895407656	D 100P P 40M 300 CAI BK
					40895410316	D 100P P 40M 300 CAI WT				40895404678	LODEV 103020 25 100M 300 10 50
					40895410314	D 100P P 40M 300 CAI WT				40895404690	LODEV 103020 25 100M 300 10 50
					40895410302	E 100P P 40M 300 CAI WT				40895404692	E 100P P 40M 300 CAI BK
					40895410310	D 100P P 40M 300 CAI WT				40895404694	E 100P P 40M 300 CAI BK
					40895410308	D 100P P 40M 300 PLS WT				40895404696	D 100P P 40M 300 PLS BK
					40895410314	D 100P P 40M 300 PLS WT				40895407672	D 100P P 40M 300 PLS BK
					40895410316	D 100P P 40M 300 CAI WT				40895407674	D 100P P 40M 300 CAI BK
40895404303	LODEV 107020 12 40M 300 100 50 10				40895410312	D 100P P 40M 300 CAI WT				40895407676	D 100P P 40M 300 CAI BK
					40895410310	D 100P P 40M 300 PLS WT				40895404698	LODEV 107020 28 40M 300 100 50 10
					40895410308	D 100P P 40M 300 PLS WT				40895404699	LODEV 103020 21 100M 300 10 50
					40895410316	D 100P P 40M 300 PLS WT				40895404700	E 100P P 40M 300 PLS BK
					40895410314	D 100P P 40M 300 CAI WT				40895404701	E 100P P 40M 300 CAI BK
					40895410312	D 100P P 40M 300 CAI WT				40895404702	E 100P P 40M 300 CAI BK
					40895410310	D 100P P 40M 300 PLS WT				40895404703	E 100P P 40M 300 PLS BK
					40895410308	D 100P P 40M 300 PLS WT				40895404704	E 100P P 40M 300 PLS BK
40895404303	LODEV 103020 05 100M 300 100 50 10				40895410316	D 100P P 40M 300 PLS WT				40895404705	E 100P P 40M 300 PLS BK
					40895410314	D 100P P 40M 300 CAI WT				40895404706	E 100P P 40M 300 CAI BK
					40895410312	D 100P P 40M 300 CAI WT				40895404707	E 100P P 40M 300 CAI BK
					40895410310	D 100P P 40M 300 PLS WT				40895404708	E 100P P 40M 300 PLS BK
					40895410308	D 100P P 40M 300 PLS WT				40895404709	E 100P P 40M 300 PLS BK
40895404303	LODEV 103020 05 100M 300 100 50 10				40895410316	D 100P P 40M 300 PLS WT				40895404710	E 100P P 40M 300 PLS BK
					40895410314	D 100P P 40M 300 CAI WT				40895404711	E 100P P 40M 300 CAI BK
					40895410312	D 100P P 40M 300 CAI WT				40895404712	E 100P P 40M 300 CAI BK
					40895410310	D 100P P 40M 300 PLS WT				40895404713	E 100P P 40M 300 PLS BK
					40895410308	D 100P P 40M 300 PLS WT				40895404714	E 100P P 40M 300 PLS BK
40895404304											

– For Guarantee see www.ledvance.com/guarantee

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.