

PRODUCT DATASHEET

LISOEV 1074x29 49 40W 940 S90U19 BK

LINEAR INDIVILED LIGHT SOURCES DIRECT | Upgrade or replacement light source unit for symmetric light distribution



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Easy installation, no tools required for connection
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90

Product features

- Symmetric light distribution
- Lifetime (L80/B10): 70,000 h (at 25 °C)
- Beam angle: 90°


TECHNICAL DATA

Electrical data


Nominal wattage	40.00 W
Nominal voltage	45 V
Nominal current	800.000 mA

Photometrical data

Luminous flux	4900 lm
Luminous efficacy	123 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdcn
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	90 °
UGR	19

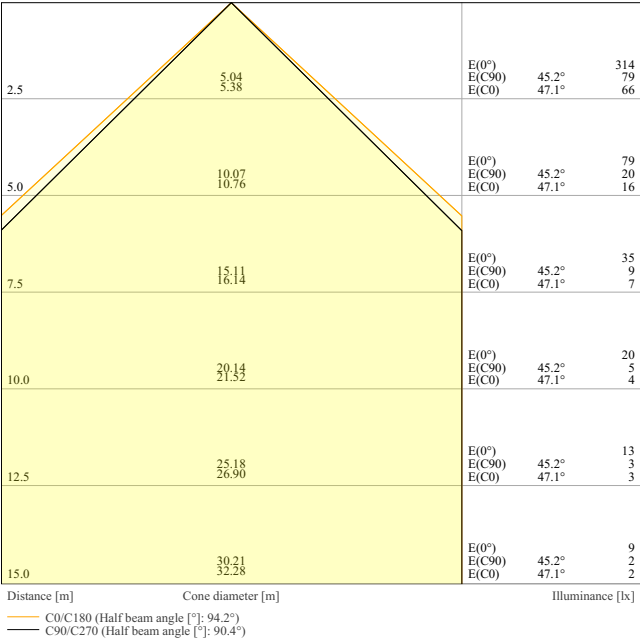

LISOEV 1074X29 49 40W 940 S90U19 BK LEDV 800mA

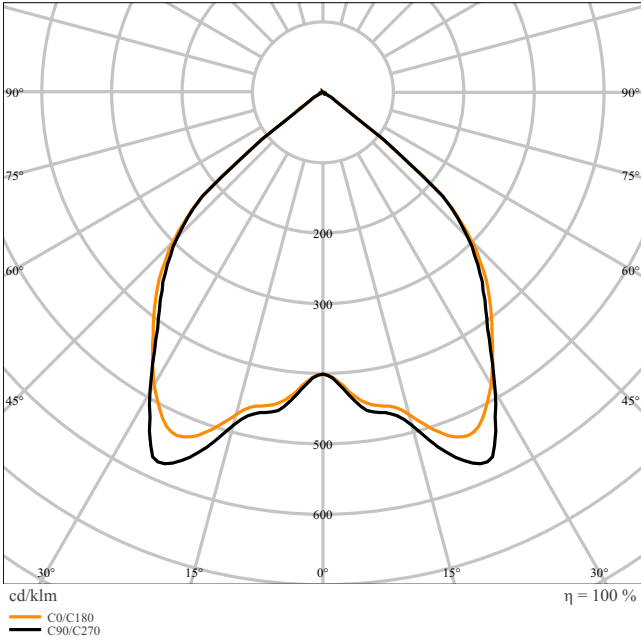

LISOEV 1074X29 49 40W 940 S90U19 BK LEDV 800mA

Dimensions & Weight

Length	1074.00 mm
--------	------------

Width	29.00 mm
Height	19.00 mm
Product weight	363.00 g



1 2m DIRECT LED MODULE

Materials & Colors

Product color	Black
Housing color	Black

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Push-in clamp
Type of protection	IP20
Dimmable	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h
Lifespan L80/B10 at 25 °C	70000 h
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
-----------	---------------------------------------

Additional product data

Product remark	Available from September 2025
----------------	-------------------------------

Safety advice

– All electrical connections must be made by a qualified person.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	User instruction G11244437
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11218810
	Legal information	Legal Insert G11244392
	Legal information	LSI insert G11244301
Photometric and lighting design files		Document name
	IES file (IES)	LISOEV 1074X29 49 40W 940 S90U19 BK LEDV 800mA
	LDT file (Eulumdat)	LISOEV 1074X29 49 40W 940 S90U19 BK LEDV 800mA
	UGR file (UGR table)	LISOEV 1074X29 49 40W 940 S90U19 BK LEDV 800mA
	Light distribution curve type cone	LISOEV 1074X29 49 40W 940 S90U19 BK LEDV 800mA
	Light distribution curve type polar	LISOEV 1074X29 49 40W 940 S90U19 BK LEDV 800mA
CAD/BIM files		Document name
	CAD STEP 3D	LN INDV DIRECT G2 LISOEV 1200

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854652080	Folding box 1	36 mm x 1,082 mm x 26 mm	449.00 g	1.01 dm ³
4099854652097	Shipping box 10	1,094 mm x 184 mm x 67 mm	5044.00 g	13.49 dm ³
4099854652103	Shipping box 20	1,114 mm x 204 mm x 158 mm	11196.00 g	35.91 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

DIRECT		INDIRECT			
EAN	LICREV	EAN	LICREV	EAN	LINEAR INDI.LICREV
				40000040670070	D 1000 P 4000 400 PS IS BK
				40000040670073	D 1000 P 4000 400 PS IS BK
				40000040670080	D 1000 P 4000 400 PS IS BK
				40000040670083	D 1000 P 4000 400 PS IS BK
400000405000	LICREV 107470 40 400 100 300 100	40000040670086	D 1000 P 4000 400 PS IS BK	40000040670089	D 1000 P 4000 400 PS IS BK
		40000040670091	LICREV 100001 20 100 100 100	40000040670094	D 1000 P 4000 400 PS IS BK
		40000040670093	LICREV 100001 20 100 100 100	40000040670096	D 1000 P 4000 400 PS IS BK
		40000040670095	LICREV 100001 20 100 100 100	40000040670097	D 1000 P 4000 400 PS IS BK
400000405000	LICREV 107470 40 400 100 300 100	40000040670101	LICREV 100001 20 100 100 100	40000040670103	D 1000 P 4000 400 PS IS BK
		40000040670104	LICREV 100001 20 100 100 100	40000040670106	D 1000 P 4000 400 PS IS BK
		40000040670107	LICREV 100001 20 100 100 100	40000040670109	D 1000 P 4000 400 PS IS BK
		40000040670110	LICREV 100001 20 100 100 100	40000040670112	D 1000 P 4000 400 PS IS BK
400000405110	LICREV 100001 10 100 100 300 100	40000040670113	LICREV 100001 20 100 100 100	40000040670115	D 1000 P 4000 400 PS IS BK
		40000040670116	LICREV 100001 20 100 100 100	40000040670118	D 1000 P 4000 400 PS IS BK
		40000040670119	LICREV 100001 20 100 100 100	40000040670121	D 1000 P 4000 400 PS IS BK
		40000040670122	LICREV 100001 20 100 100 100	40000040670124	D 1000 P 4000 400 PS IS BK
		40000040670126	LICREV 100001 20 100 100 100	40000040670128	D 1000 P 4000 400 PS IS BK
		40000040670130	LICREV 100001 20 100 100 100	40000040670133	D 1000 P 4000 400 PS IS BK
400000405110	LICREV 100001 10 100 100 300 100	40000040670134	LICREV 100001 20 100 100 100	40000040670136	D 1000 P 4000 400 PS IS BK
		40000040670138	LICREV 100001 20 100 100 100	40000040670141	D 1000 P 4000 400 PS IS BK
400000405200	LICREV 107470 40 400 100 300 100	40000040670142	LICREV 100001 20 100 100 100	40000040670144	D 1000 P 4000 400 PS IS BK
		40000040670146	LICREV 100001 20 100 100 100	40000040670148	D 1000 P 4000 400 PS IS BK
400000405200	LICREV 107470 40 400 100 300 100	40000040670149	LICREV 100001 20 100 100 100	40000040670151	D 1000 P 4000 400 PS IS BK
		40000040670152	LICREV 100001 20 100 100 100	40000040670154	D 1000 P 4000 400 PS IS BK
400000405200	LICREV 107470 40 400 100 300 100	40000040670155	LICREV 100001 20 100 100 100	40000040670157	D 1000 P 4000 400 PS IS BK
		40000040670158	LICREV 100001 20 100 100 100	40000040670160	D 1000 P 4000 400 PS IS BK
400000405200	LICREV 107470 40 400 100 300 100	40000040670161	LICREV 100001 20 100 100 100	40000040670163	D 1000 P 4000 400 PS IS BK
		40000040670164	LICREV 100001 20 100 100 100	40000040670166	D 1000 P 4000 400 PS IS BK
400000405200	LICREV 107470 40 400 100 300 100	40000040670167	LICREV 100001 20 100 100 100	40000040670169	D 1000 P 4000 400 PS IS BK
		40000040670171	LICREV 100001 20 100 100 100	40000040670173	D 1000 P 4000 400 PS IS BK
400000405200	LICREV 107470 40 400 100 300 100	40000040670174	LICREV 100001 20 100 100 100	40000040670176	D 1000 P 4000 400 PS IS BK
		40000040670178	LICREV 100001 20 100 100 100	40000040670180	D 1000 P 4000 400 PS IS BK
400000405200	LICREV 107470 40 400 100 300 100	40000040670181	LICREV 100001 20 100 100 100	40000040670183	D 1000 P 4000 400

– For Guarantee see www.ledvance.com/guarantee

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.