

PRODUCT DATASHEET

LISOEV 1465x31 28 23W 930 S130

LINEAR INDIVIDUAL LIGHT SOURCES INDIRECT | Upgrade or replacement light source unit for indirect, diffuse light distribution



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Easy installation, no tools required for connection
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90

Product features

- Indirect, diffuse light distribution
- Lifetime (L80/B10): 70,000 h (at 25 °C)
- Beam angle: 90°


TECHNICAL DATA

Electrical data


Nominal wattage	23.00 W
Nominal voltage	45 V
Nominal current	466.000 mA

Photometrical data

Luminous flux	2850 lm
Luminous efficacy	123 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdcn
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	130 °
UGR	19

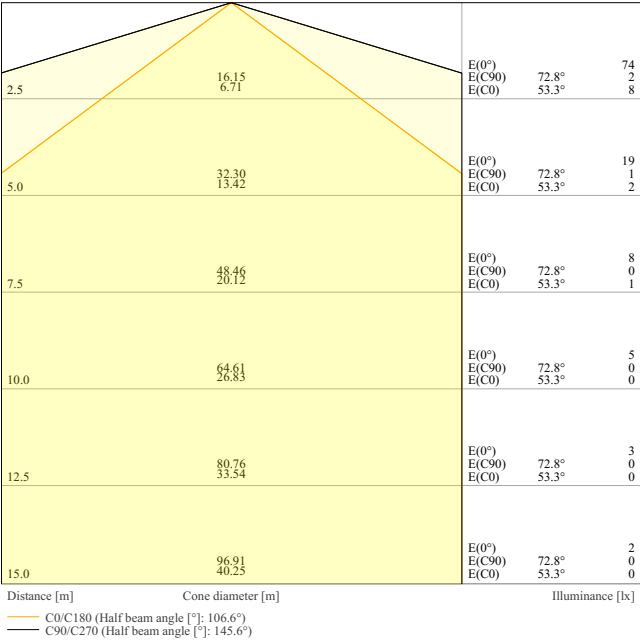

LISOEV 1465X31 28 23W 930 S130 LEDV 466mA

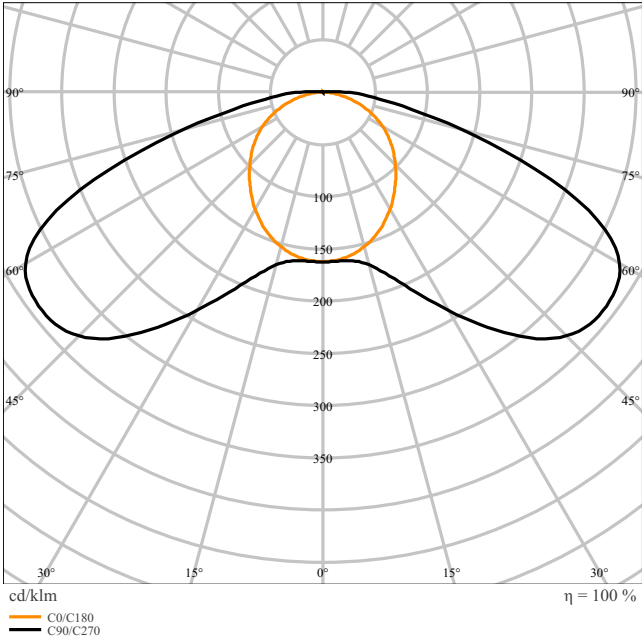

LISOEV 1465X31 28 23W 930 S130 LEDV 466mA

Dimensions & Weight

Length	1465.00 mm
--------	------------

Width	31.00 mm
Height	11.00 mm
Product weight	337.00 g
Cable length	100.000



1 5m INDIRECT LED MODULE

Materials & Colors

Product color	Grey
Housing color	Grey

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Push-in clamp
Type of protection	IP20
Dimmable	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h
Lifespan L80/B10 at 25 °C	70000 h
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
-----------	---------------------------------------

Additional product data

Product remark	Available from September 2025
----------------	-------------------------------

Safety advice

– All electrical connections must be made by a qualified person.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	User instruction G11244437
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11218810
	Legal information	Legal Insert G11244392
	Legal information	LSI insert G11244301
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
Photometric and lighting design files		Document name
	IES file (IES)	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
	LDT file (Eulumdat)	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
	Light distribution curve type cone	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
	Light distribution curve type polar	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
CAD/BIM files		Document name
	CAD STEP 3D	LN INDV INDIRECT G2 LISOEV 1500

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854285059	Folding box 1	36 mm x 1,472 mm x 17 mm	417.00 g	0.90 dm ³
4099854285066	Shipping box 10	1,484 mm x 184 mm x 67 mm	4270.00 g	18.29 dm ³
4099854285073	Shipping box 20	1,504 mm x 204 mm x 158 mm	9450.00 g	48.48 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DIRECT		ROBERT			
EAN	LSDEV	EAN	LSDEV	EAN	LINEAR Index/ID/WT
				40095618310	C1 100P 40W 100 PLS WT
				40095618320	C1 100P 40W 100 PLS WT
				40095618330	C1 100P 40W 100 CAH WT
				40095618340	C1 100P 40W 100 CA LK WT
40095618350	LSDEV 107403 18 40W 100 30A5 1/3 U	40095618360	LSDEV 100301 20 100 100 3 U	40095618370	C1 100P 40W 100 CAH WT
				40095618380	C1 100P 40W 100 CA LK WT
				40095618390	C1 100P 40W 100 CAH WT
				40095618400	C1 100P 40W 100 CA LK WT
				40095618410	C1 100P 40W 100 CAH WT
				40095618420	C1 100P 40W 100 CA LK WT
				40095618430	C1 100P 40W 100 CAH WT
				40095618440	C1 100P 40W 100 CA LK WT
				40095618450	C1 100P 40W 100 CAH WT
				40095618460	C1 100P 40W 100 CA LK WT
				40095618470	C1 100P 40W 100 CAH WT
				40095618480	C1 100P 40W 100 CA LK WT
				40095618490	C1 100P 40W 100 CAH WT
				40095618500	C1 100P 40W 100 CA LK WT
				40095618510	C1 100P 40W 100 CAH WT
				40095618520	C1 100P 40W 100 CA LK WT
				40095618530	C1 100P 40W 100 CAH WT
				40095618540	C1 100P 40W 100 CA LK WT
				40095618550	C1 100P 40W 100 CAH WT
				40095618560	C1 100P 40W 100 CA LK WT
				40095618570	C1 100P 40W 100 CAH WT
				40095618580	C1 100P 40W 100 CA LK WT
				40095618590	C1 100P 40W 100 CAH WT
				40095618600	C1 100P 40W 100 CA LK WT
				40095618610	C1 100P 40W 100 CAH WT
				40095618620	C1 100P 40W 100 CA LK WT
				40095618630	C1 100P 40W 100 CAH WT
				40095618640	C1 100P 40W 100 CA LK WT
				40095618650	C1 100P 40W 100 CAH WT
				40095618660	C1 100P 40W 100 CA LK WT
				40095618670	C1 100P 40W 100 CAH WT
				40095618680	C1 100P 40W 100 CA LK WT
				40095618690	C1 100P 40W 100 CAH WT
				40095618700	C1 100P 40W 100 CA LK WT
				40095618710	C1 100P 40W 100 CAH WT
				40095618720	C1 100P 40W 100 CA LK WT
				40095618730	C1 100P 40W 100 CAH WT
				40095618740	C1 100P 40W 100 CA LK WT
				40095618750	C1 100P 40W 100 CAH WT
				40095618760	C1 100P 40W 100 CA LK WT
				40095618770	C1 100P 40W 100 CAH WT
				40095618780	C1 100P 40W 100 CA LK WT
				40095618790	C1 100P 40W 100 CAH WT
				40095618800	C1 100P 40W 100 CA LK WT
				40095618810	C1 100P 40W 100 CAH WT
				40095618820	C1 100P 40W 100 CA LK WT
				40095618830	C1 100P 40W 100 CAH WT
				40095618840	C1 100P 40W 100 CA LK WT
				40095618850	C1 100P 40W 100 CAH WT
				40095618860	C1 100P 40W 100 CA LK WT
				40095618870	C1 100P 40W 100 CAH WT
				40095618880	C1 100P 40W 100 CA LK WT
				40095618890	C1 100P 40W 100 CAH WT
				40095618900	C1 100P 40W 100 CA LK WT

EIN	DIRECT		INDIRECT		EIN	LINEAR INDI-LEVEL	
	EAN	LOREV	EAN	LOREV		EAN	LINEAR INDI-LEVEL
400005400209	15000710-70-45 LOR 100 500 100	400005400209	15000710-70-45 LOR 100 500 100	400005400209	400005400209	15000710-70-45	LOR 100 500 100 PS BK
					400005400209	15000710-70-45	LOR 100 500 100 PS BK
					400005400209	15000710-70-45	LOR 100 500 100 PS BK
					400005400209	15000710-70-45	LOR 100 500 100 PS BK
					400005400209	15000710-70-45	LOR 100 500 100 PS BK
400005400200	15000710-70-45 LOR 100 500 100	400005400200	15000710-70-45 LOR 100 500 100	400005400200	400005400200	15000710-70-45	LOR 100 500 100 PS BK
					400005400200	15000710-70-45	LOR 100 500 100 PS BK
					400005400200	15000710-70-45	LOR 100 500 100 PS BK
					400005400200	15000710-70-45	LOR 100 500 100 PS BK
					400005400200	15000710-70-45	LOR 100 500 100 PS BK
400005400210	15000710-70-45 LOR 100 500 100	400005400210	15000710-70-45 LOR 100 500 100	400005400210	400005400210	15000710-70-45	LOR 100 500 100 PS BK
					400005400210	15000710-70-45	LOR 100 500 100 PS BK
					400005400210	15000710-70-45	LOR 100 500 100 PS BK
					400005400210	15000710-70-45	LOR 100 500 100 PS BK
					400005400210	15000710-70-45	LOR 100 500 100 PS BK
400005400211	15000710-70-45 LOR 100 500 100	400005400211	15000710-70-45 LOR 100 500 100	400005400211	400005400211	15000710-70-45	LOR 100 500 100 PS BK
					400005400211	15000710-70-45	LOR 100 500 100 PS BK
					400005400211	15000710-70-45	LOR 100 500 100 PS BK
					400005400211	15000710-70-45	LOR 100 500 100 PS BK
					400005400211	15000710-70-45	LOR 100 500 100 PS BK
400005400212	15000710-70-45 LOR 100 500 100	400005400212	15000710-70-45 LOR 100 500 100	400005400212	400005400212	15000710-70-45	LOR 100 500 100 PS BK
					400005400212	15000710-70-45	LOR 100 500 100 PS BK
					400005400212	15000710-70-45	LOR 100 500 100 PS BK
					400005400212	15000710-70-45	LOR 100 500 100 PS BK
					400005400212	15000710-70-45	LOR 100 500 100 PS BK
400005400213	15000710-70-45 LOR 100 500 100	400005400213	15000710-70-45 LOR 100 500 100	400005400213	400005400213	15000710-70-45	LOR 100 500 100 PS BK
					400005400213	15000710-70-45	LOR 100 500 100 PS BK
					400005400213	15000710-70-45	LOR 100 500 100 PS BK
					400005400213	15000710-70-45	LOR 100 500 100 PS BK
					400005400213	15000710-70-45	LOR 100 500 100 PS BK
400005400214	15000710-70-45 LOR 100 500 100	400005400214	15000710-70-45 LOR 100 500 100	400005400214	400005400214	15000710-70-45	LOR 100 500 100 PS BK
					400005400214	15000710-70-45	LOR 100 500 100 PS BK
					400005400214	15000710-70-45	LOR 100 500 100 PS BK
					400005400214	15000710-70-45	LOR 100 500 100 PS BK
					400005400214	15000710-70-45	LOR 100 500 100 PS BK

– For Guarantee see www.ledvance.com/guarantee

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.