




PRODUCT DATASHEET

Ceiling Fan Grill Ring 55W CCT White

Ceiling fan grill | LED Ceiling Fan Grill that combines light and ventilation

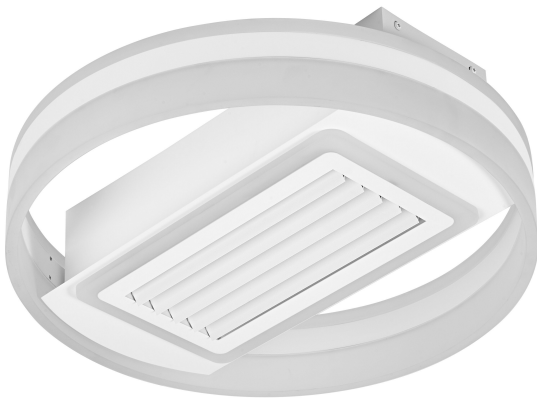

Areas of application

- Indoor
- Living areas (living rooms, dining rooms, bedrooms etc.)

Product benefits

- Airflow suitable for 13-20 m²
- Set color temperature according to daytime and usage (dining, relaxing, social events...)
- Set light output from 0-100% for personal comfort
- Pleasant use during sleeping phase (low noise on low level speed)
- Aesthetic appearance of a ceiling luminaire
- Summer / winter mode
- 5 years guarantee

Product features

- Airflow: max 700 m³/h
- Speed levels: 1 - 6 steps
- Timer: 1 h / 2 h / 4 h
- Control unit: remote control
- Motor type: DC
- Adjustable color temperature via Tunable White: 3,000...6,500 K



- Lumen source: 4200 lm
- Dimmable
- Type of protection: IP20

TECHNICAL DATA

Electrical data


Nominal wattage	55.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	230.000 mA
Max. number of luminaires per miniature circuit breaker B16	320
Max. number of luminaires per miniature circuit breaker C16	320
Power factor λ	> 0.90
Total harmonic distortion	< 70 %
Protection class	II
Operating mode	Mains voltage

Photometrical data

Luminous flux	3100 lm
Total luminous flux of contained light sources	4200 lm
Luminous efficacy	84 lm/W
Color temperature	3000...6500 K
Light color (designation)	Warm White / Cool Daylight
Color rendering index Ra	> 80
Standard deviation of color matching	< 6 sdcm
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	260 °

Dimensions & Weight

Diameter	500.00 mm
Height	135.00 mm
Product weight	4700.00 g



CEILING FAN GRILL RING CCT WT

Materials & Colors

Product color	White
Housing color	White
Body material	Steel Plastic
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Terminal, 2-Pole (L, N)
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	Yes
Mounting type	Surface
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	30000 h ¹⁾
Number of switching cycles	15000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Emergency lighting

Type of emergency operation test	None
----------------------------------	------

Certificates & Standards

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

EQUIPMENT / ACCESSORIES

- Mounting screws and dowels included
- Safety rope
- Requires 2xAAA batteries (not included)

Safety advice

- Luminaire must be disconnected from mains during installation, maintenance and cover removal
- Check wall-ceiling for suitability. If uncertain, seek professional advice.
- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	CEILING FAN GRILL
	Legal information	Safety insert G11219301
	Declarations of conformity	CEILING FAN GRILL
	Declarations of conformity UKCA	CEILING FAN GRILL

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854445552	Folding box 1	560 mm x 560 mm x 180 mm	6306.00 g	56.45 dm ³
4099854445569	Shipping box 1	578 mm x 196 mm x 578 mm	7246.00 g	65.48 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.